

PLAN VIEW

ROOM TEMP.:
35°F
 INTERIOR AREA:
874 sq. ft.
 HORSEPOWER:
(4) hp.
 REFRIGERANT:
R-404A
 ELEC. SUPPLY
115/208-230
 PHASE:
Three
 CYCLE:
60 hz.
 AMPERAGE:
51.4 MCA

6" WALLS
 6" CROWNED ROOF
 1/2" STANDARD DUTY FLOOR
 STRIP CURTAINS
 SHELF MOUNT REFRIGERATOIN

DRAWING APPROVAL

PLEASE INDICATE YOUR APPROVAL OF THIS DESIGN, THE DIMENSIONS, DOOR LOCATION/SWING, ELECTRICAL REQUIREMENTS, AND EQUIPMENT LOCATIONS BY SIGNING BELOW AND RETURNING TO POLAR KING.


DATE: _____ BY: _____

Polar King A12046482

-

DRAWN BY: RLM	MODEL NO.: H1660	SCALE: 1/8"=1'-0"	DATE: 11-5-18
------------------	---------------------	----------------------	------------------

DRAWING NAME: Polar King H1660

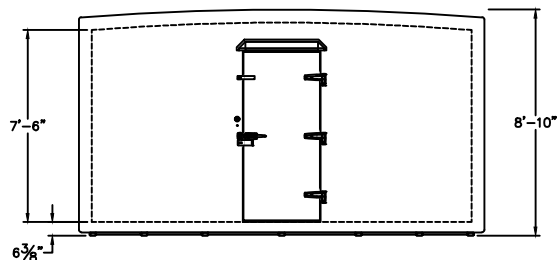

ELEVATION VIEW

THE REFRIGERATION SYSTEM SHOWN IS DESIGNED TO MAINTAIN INDICATED TEMPERATURE IF PRODUCT ENTERS WITHIN 10°F OF FINAL HOLDING TEMPERATURE. PLEASE CONTACT YOUR SALES REP IF INCOMING PRODUCT WILL BE ENTERING AT HIGHER TEMPERATURES. REFRIGERATION DESIGN IS SUBJECT TO CHANGE FOR IMPROVEMENTS.



POLAR KING
 INTERNATIONAL, INC.

FORT WAYNE, INDIANA 1-800-752-7178